

Technical drawings are subject to change without notice.  
 All millimeter dimensions are exact and supersede inch conversions.

Copyright MWE NA Inc., all rights reserved. Reproduction or other use of these designs without written consent from MWE NA Inc. is prohibited.






Alternative lengths may be custom ordered

All ladder systems require reinforced walls, cabinets, or shelving.

Rails require reinforced walls or shelving the full length of the rail to ensure proper installation.

\* All Rails used for "Rebel" ladder are 25mm [1"] solid stainless steel and are shipped pre-drilled.

\*\* Wall mounts supplied with M8 cylinder head screw ZK8.WOOD (Wood Lag) [Alternative: ZK.8.MACHINE] and include 50mm [1 15/16"] diameter rosette.

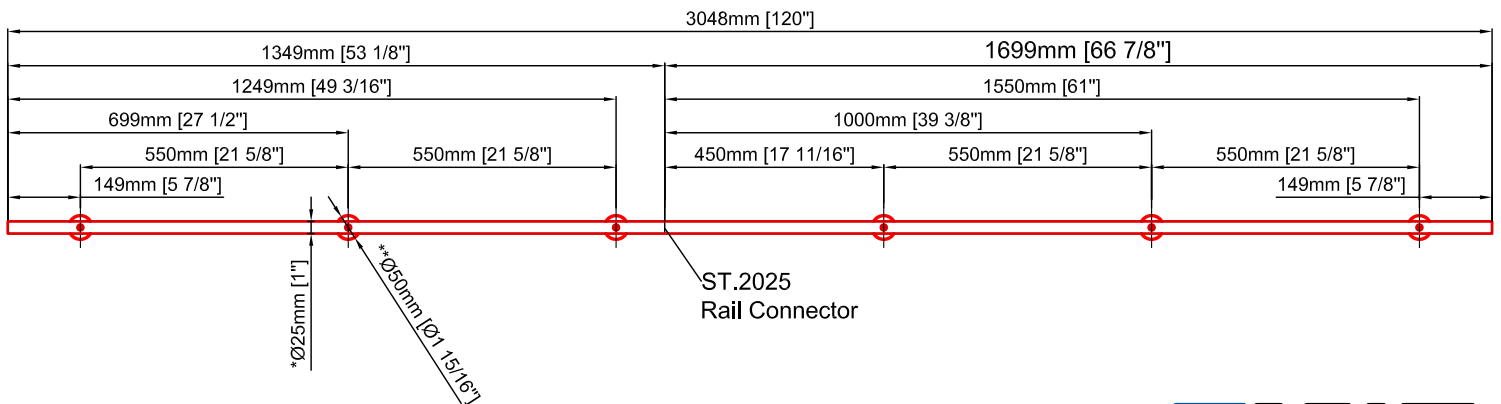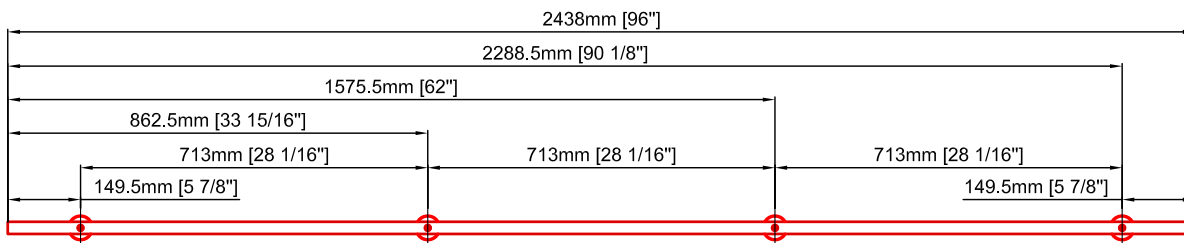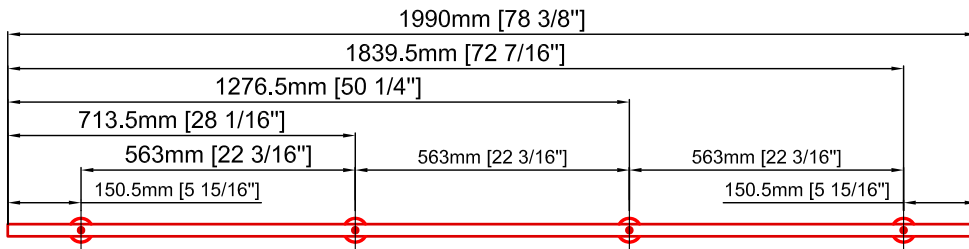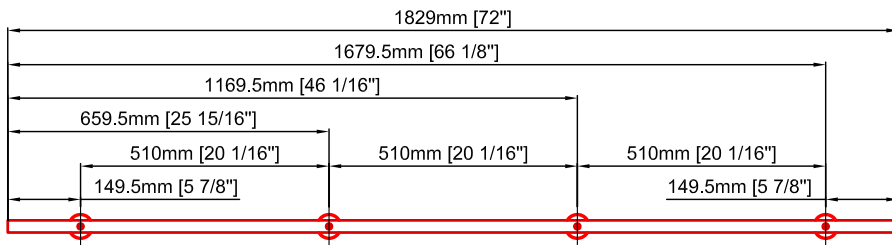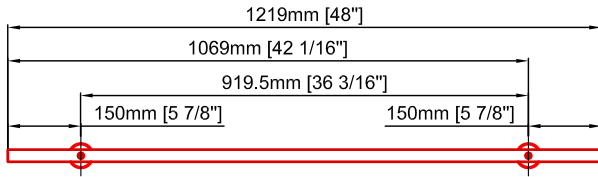

## Inventory Rail Configurations

Date Prepared: March 2020 | Prepared By: CDA

**MWE**<sup>®</sup>  
 NORTH AMERICA  
 Tel.: 954-982-6595  
 Email: sales@mwe-na.com  
[www.mwe-na.com](http://www.mwe-na.com)